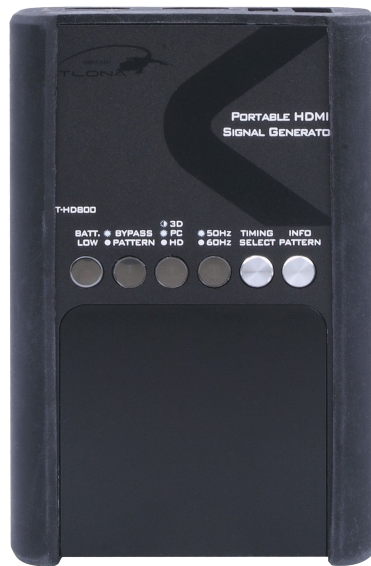




ATLONA
Connecting technology to your world

Atlona Portable HDMI Signal Generator with 3D Patterns

AT-HD800



User Manual

Table of Contents

1. Introduction	3
2. Applications	3
3. Package Contents	3
4. Features	3
5. Specification	4
6. Power Consuming Chart	4
7. Operation Controls and Functions	4
7.1. Bottom Panel	4
7.2. Front Panel	5
8. Support Timing Table	8
9. Support Pattern Table	8
10. Connection and Installation	10
11. Safety Information	11
12. Warranty	12
13. Atlona Product Registration	13

INTRODUCTION

The Atlona HD800 is a Portable HDMI signal generator capable of testing any video resolution or timing in any digital format. The HD800 allows users to diagnose specific resolution, video timing, EDID, and color space issues in any DVI or HDMI video system. The HD800 features 19 test patterns including 3D tests Side by side, Top and Bottom, and Frame packing, a format that is mandatory for all HDMI 1.4 devices. This powerful pocket sized signal generator features an HDMI output as well as an HDMI pass through to easily switch between test patterns and content from any other digital sources, while also giving the ability to read the EDID from the input source and displaying it on the display.

APPLICATIONS

- Residential or Commercial Installation. The AT-HD800 is a very handy (must have) tool which helps to make sure that all cables, extenders, switchers, AV receivers are passing proper signal because the installation is finished. Even before sources arrive, the generator could be used to make sure that everything is working and HDCP and EDID are passing through.
- Cable, Display, Source Manufactures. Manufactures could be using HD800 in their QC department to make sure certain frequencies and resolutions are working.

PACKAGE CONTENTS:

- AT-HD800 Portable HDMI Signal Generator with 3D
- 4 x AA Batteries
- 5V/2.6A DC power adaptor
- Protective Sleeve
- Manual

FEATURES:

- Portable size and battery operated HDMI generator
- Supports 19 Testing Patterns which includes 3 x 3D
- Cable integrity testing ability (see page 4, "7.1 Bottom Panel")
- Computer Testing resolutions: VGA, SVGA, XGA, SXGA, WUXGA
- HDTV Testing Resolutions: 480i, 576i, 480p, 576p, 720p (50/60Hz), 1080i (50/60Hz), 1080p (24/50/60)
- 3D HDTV Testing: 720p (50/60Hz), 1080p 24Hz
- 2-channel LPCM is always active to test audio 1K -20dB
- EDID Reading function, allows user to view the displays capabilities (which video and audio formats the display is capable of)
- HDMI Input, designed for reading EDID from both source and display capabilities side by side. This helps to prevent a lot of issues with installation and also troubleshoot the EDID readings in applications where a lot of equipment is used.
- The Generator comes with a protective rubber case
- Power supply is included for cases where customer has no batteries
- Last memory function, allows the generator remember the setting the user had prior to powering OFF.

SPECIFICATIONS:

Computer Testing resolutions	VGA, SVGA, XGA, SXGA, WUXGA
HDTV Testing resolutions	480i, 576i, 480p, 576p, 720p (50/60Hz), 1080i (50/60Hz), 1080p (24/50/60)
3D HDTV Testing	720p (50/60Hz), 1080p 24Hz
3D Patterns	Frame Packing, Side-by-Side(Half), Top-and-Bottom
Audio Testing	2-channel
EDID	Supports Reading EDID from Source and Display
Indicators Lights	Indicators will show the resolution outputted and frequency
TMDS Clock Frequency	6.75Gps
Output	1 x HDMI (Type A)
Input	1 x HDMI (Type A)
Power	4 x AA Batteries or 5V/2A Power supply
Power Consumption	2.1W Bypass / 1.1W Patterns
ESD Protection	± 8kV (air-gap discharge); ± 4kV (contact discharge)
Dimensions (inch)	5W x 3.5L x 1H
Weight	0.4LB - without batteries
Operating Temperature	0°C ~ 40°C / 32°F~104°F
Relative Humidity	20~90% RH (non-condensing)

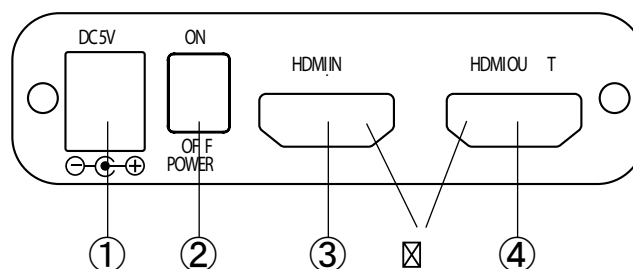
POWER CONSUMING CHART

Mode	Resolution	Voltage	Time Out
Bypass	1080p/60	~420mA	~6.1hrs
Pattern	1080p/60	~220mA	~8hrs

Disclaimer: The above figures are tested base on Sony's 2000mA AA batteries are for referencing only. Different mode/resolution and batteries used may have different results.

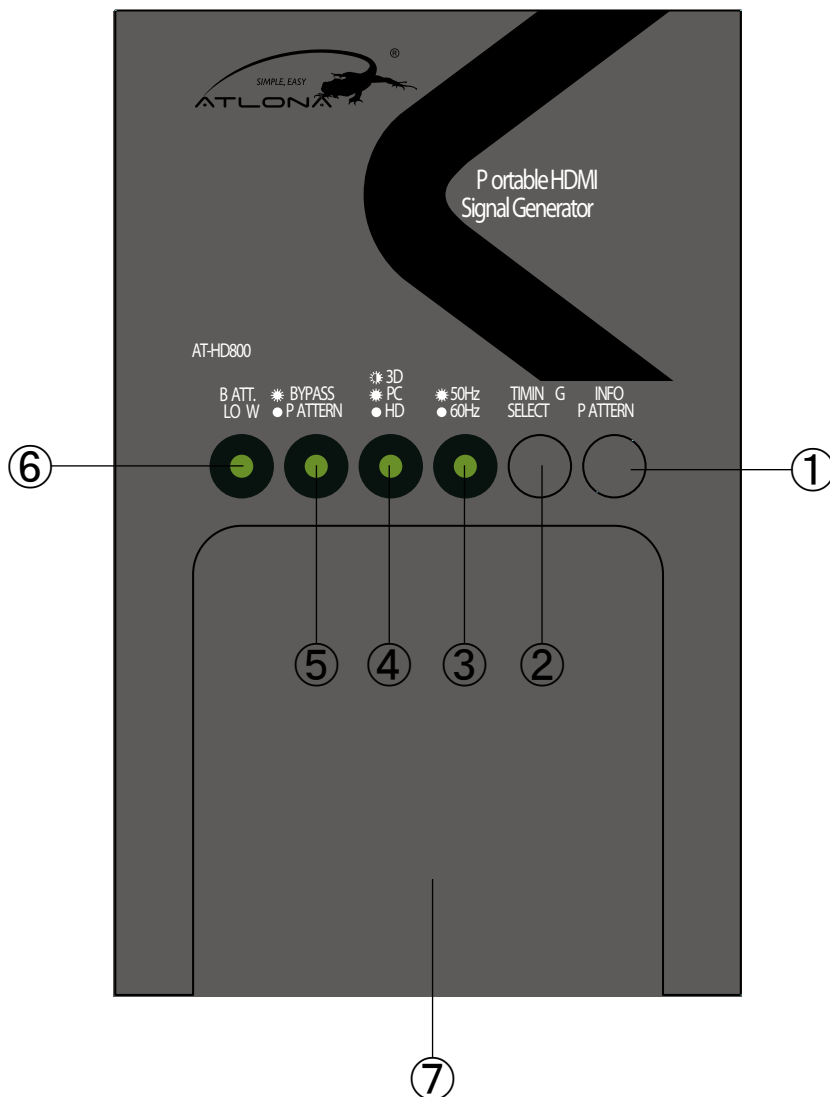
OPERATION CONTROLS AND FUNCTIONS

7.1. Bottom Panel



1. DC 5V: This input is for 5V power supply (if batteries are used, the power supply is not required)
2. Power Switch: Switch UP – ON, Switch Down - OFF
Note: If user is running out of power on the batteries and wants to use power supply, the power cycle is required, so that the AT-HD800 will recognize power supply as a priority.
3. HDMI IN: This input is for connecting input source such as DVD, Computer, Cables Box or any other source for testing and pulling EDID file.
4. HDMI OUT: This connection is for connecting the generator to a display or devices before the display when testing the full system capabilities.
Note: If an image is not present press and hold the Info Pattern button for three seconds then release. This will reset the display to its native resolution.
5. For HDMI cable integrity test, insert both ends of the cable into the AT-HD800 Unit. See “Timing Select” button for more information.

7.2. Front Panel



1. INFO/PATTERN:

- 1.1. If the input of the AT-HD800 is connected with the source and output is connected with the display (or other gear before the display) and user wants to view capabilities of both source and display side by side the Info Pattern can be pressed. This is needed to make sure that user knows the TV's capabilities and would not send something that is higher than acceptable by the display or the chain prior to the display.



- 1.2. If the HDMI input is not connected, the “Info Pattern” can be pressed repeatedly to switch between different patterns. By pressing Info/Pattern button, OSD menu will reveal forward/backward navigation for pattern settings. Within three seconds press Timing/Select button to scroll forward, or press Info/Pattern to scroll backwards through pattern options. To view all 19 options resolution MUST be set to 720p. Note: Only 10 options available for all other resolution settings.
2. **TIMING SELECT:** This button will only be active when HDMI input is not connected. Press this button repeatedly to bring up different resolutions (25 timings). By pressing Timing/Select button, OSD menu will reveal forward/backward navigation for resolution setting. Within three seconds press Timing/Select button to scroll forward, or press Info/Pattern to scroll backwards through the resolution options
- 2.5 **CABLE INTEGRITY TEST:** Hold the timing select button for three(3) second to initiate cable test. If the green LED is flashing, the cable is NOT transferring signal properly. If LED is sold, the cable has passed the test. Hold “timing select” for three(3) seconds again to exit cable test.
3. **50/60 Hz:** The LED will illuminate when the signal resolutions are 50Hz. 50Hz refresh rate is usually not compatible with displays sold in USA, Canada or Japan. 50hz is a standard for most Europe and Asia.
4. **3D/PC/HD LED:**
 - 4.1. 3D – if the LED is flashing constantly, it means that user is sending 3D pattern.
 - 4.2. PC – if the LED is illuminated green, it means that user is sending one of the computer resolutions: 640~1920x1200 (VGA~WUXGA)
 - 4.3. HD – if the LED is not illuminated, it means that user is sending one of the HD resolutions: 480p~1080p
5. **Bypass/Pattern LED:** This LED will illuminate in green when the input source is connected. When the input source is not connected the LED will not illuminate.




6. **BATT. LOW:** This LED will illuminate red when the power is on. If the LED is flashing it means the power is below 10% and the AT-HD800 needs new batteries or a power supply.
7. **Battery Container:** This container is for 4 x AA batteries.
8. If **Timing Select** and **Info Pattern** pressed at the same time, user can fast switch between 60Hz and 50Hz.







SUPPORT TIMING TABLE



No.	Resolution	V Hz	No.	Resolution	V Hz
1	480p	60	14	1024x768	60
2	720p	60	15	1280x1024	60
3	1080i	60	16	1920x1200	60
4	1080p	60	17	720p (3D Frame Packing)	60
5	480i	60	18	720p (3D Side-by-Side)	60
6	576i	50	19	720p (3D Top-to-Bottom)	60
7	576p	50	20	720p (3D Frame Packing)	50
8	720i	50	21	720p (3D Side-by-Side)	50
9	1080i	50	22	720p (3D Top-to-Bottom)	50
10	1080p	50	23	1080p (3D Frame Packing)	24
11	1080p	24	24	1080p (3D Side-by-Side)	24
12	640x480	60	25	1080p (3D Top-to-Bottom)	24
13	800x600	60			

Note: If you are sending a 3D pattern and you get 2 images side-by-side or 2 images top-to-bottom, this would mean that either display or devices connected to the display are not 3D capable.

SUPPORT PATTERN TABLE

Group	No.	Pattern	Description
Full Screen Purity	P01		Purity Pattern Purity offers five different full field patterns: Black, White (100% Y) Primary colors: Red, Green, Blue P01: Red P02: Green P03: Blue P04: Black P05: White
	P02		
	P03		
	P04		
	P05		

Group	No.	Pattern		Description
Color Bar	P06			P06 Horizontal Black & White Bar P07 Vertical RGB Bar
	P07			
Line	P08		720p 50/60 only	P08 Line
Grid	P09		720p 50/60 only	P09 Cross Hatch
H-Character	P10		720p 50/60 only	P10 H-Character
Color Bar	P11		720p 50/60 only	P11 Split Color Bar
	P13		720p 50/60 only	P13 6 Color Bar
Gray Scale	P12		720p 50/60 only	P12 6 steps
TV Timing Info	P14		720p 50/60 only	P14 VESA Timings
	P15		720p 50/60 only	P15 Video Timings
Battery Info	P16		720p 50/60 only	P16 Battery level

Group	No.	Pattern		Description
3D Type	P17			P17 Frame Packing
	P18			P18 Side-by-Side (Half)
	P19			P19 Top-and- Bottom

CONNECTION AND INSTALLATION



Safety Information

Safeguards



To reduce the risk of electric shock, do not expose this product to rain or moisture



If the wall plug does not fit into your local power socket, hire an electrician to replace your obsolete socket.



Do not modify the wall plug. Doing so will void the warranty and safety features.



This equipment should be installed near the socket outlet and the device should be easily accessible in the case it requires disconnection.

Precautions

FCC regulations state that any unauthorized changes or modifications to this equipment, not expressly approved by the manufacturer, could void the user's authority to operate this equipment.

Operate this product using only the included external power supply. Use of other power supplies could impair performance, damage the product, or cause fires.

In the event of an electrostatic discharge this device may automatically turn off. If this occurs, unplug the device and plug it back in.

Protect and route power cords so they will not be stepped on or pinched by anything placed on or against them. Be especially careful of plug-ins or cord exit points from this product.

Avoid excessive humidity, sudden temperature changes or temperature extremes.

Keep this product away from wet locations such as bathtubs, sinks, laundries, wet basements, fish tanks, and swimming pools.

Use only accessories recommended by Atlona to avoid fire, shock, or other hazards.

Unplug the product before cleaning. Use a damp cloth for cleaning and not cleaning fluid or aerosols. Such products could enter the unit and cause damage, fire, or electric shock. Some substances may also mar the finish of the product.

Never open, remove unit panels, or make any adjustments not described in this manual. Attempting to do so could expose you to dangerous electrical shock or other hazards. It may also cause damage to your AT-HD800. Opening the product will void the warranty.

Do not attempt to service the unit. Disconnect the product and contact your authorized Atlona reseller or contact Atlona directly.

Warranty

Limited Warranty

Atlona Technologies warrants that (a) its products (the AT-HD800) will perform substantially in accordance with the accompanying written materials for a period of 3 years from the date of receipt and (b) that the product will be free from defects in materials and workmanship under normal use and service for a period of 3 years. In the event applicable law imposes any implied warranties, the implied warranty period is limited to 3 years from the date of receipt. Some jurisdictions do not allow such limitations on duration of an implied warranty, so the above limitation may not apply to customers that fall within those areas.

Customer Remedies

Atlona Technologies' and its suppliers' entire liability and Customer's exclusive remedy shall be, at Atlona Technologies' decision, either return of the price paid for the product, repair, or replacement of the product that does not meet this Limited Warranty and which is returned to Atlona Technologies with a copy of the Customer's receipt. This Limited Warranty is void if failure of the product has resulted from accident, abuse, misapplication, or natural occurrence. In example but not limited to: power surges (electrical storms, local power outage), dropping the product (or items on the product), contact with fluids, and physical misconduct (i.e. kicking or punching). Any replacement product will be warranted for the remainder of the original warranty period.

No other warranties

To the maximum extent permitted by applicable law, Atlona Technologies and its suppliers disclaim all other warranties, either expressed or implied, including, but not limited to, implied warranties of merchantability and fitness for a particular purpose, with regard to the product and any related written materials. This Limited Warranty gives customer specific legal rights. Customers may have other rights depending on the jurisdiction.

No liability for damages

To the maximum extent permitted by applicable law, in no event shall Atlona Technologies or its suppliers be liable for any damages arising out of the use of or inability to use this product, even if Atlona Technologies has been advised of the possibility of such damages. Such damages include but are not limited to: special, incidental, consequential, or indirect damages for personal injury, loss of business profits, business interruption, loss of business information, or any other pecuniary loss. Atlona Technologies' and its suppliers' entire liability under any provision of this agreement shall be limited to the amount actually paid by you for the product. Some Jurisdictions do not allow the exclusion or limitation of liability for consequential or incidental damage. The above limitations may not apply to you in such jurisdictional cases.

Atlona Product Registration

Thank you for purchasing this Atlona product. - We hope you enjoy it and will take an extra few moments to register your new purchase.

Registration creates an ownership record if your product is lost or stolen and helps ensure you'll receive notification of performance issues and firmware updates.

At Atlona, we respect and protect your privacy, assuring you that your registration information is completely secure. Atlona product registration is completely voluntary and failure to register will not diminish your limited warranty rights.

To register go to: <http://www.atlona.com/registration>